

| Test # | # of Outlets | Oriface Size | Pitot Reading (PSIG) | Equivalent Flow (GPM) | Total Flow (GPM) | Residual Pressure (PSIG) | Comments                 |
|--------|--------------|--------------|----------------------|-----------------------|------------------|--------------------------|--------------------------|
| 0      | 0            |              |                      |                       |                  | 80                       | Used 2 1/2" Hose Monster |
| 1      | 1            | 2 1/2"       | 19                   | 735                   | 735              | 68                       |                          |
| 2      | 2            | 2 1/2"       | 13                   | 608                   | 1216             | 49                       |                          |
|        |              | 2 1/2"       | 13                   | 608                   |                  |                          |                          |

Flow Hydrant  
H19215



#625

Cow Bay Road  
10" main

Residual Hydrant  
H19231




#595


| Test # | # of Outlets | Oriface Size | Pitot Reading (PSIG) | Equivalent Flow (GPM) | Total Flow (GPM) | Residual Pressure (PSIG) | Comments                 |
|--------|--------------|--------------|----------------------|-----------------------|------------------|--------------------------|--------------------------|
| 0      | 0            |              |                      |                       |                  | 54                       | Used 2 1/2" Hose Monster |
| 1      | 1            | 2 1/2"       | 18                   | 716                   | 716              | 37                       |                          |
| 2      | 2            | 2 1/2"       | 9                    | 507                   | 1014             | 32                       |                          |
|        |              | 2 1/2"       | 9                    | 507                   |                  |                          |                          |



## **Appendix B Sanitary Sewer Peak Flow Estimates**



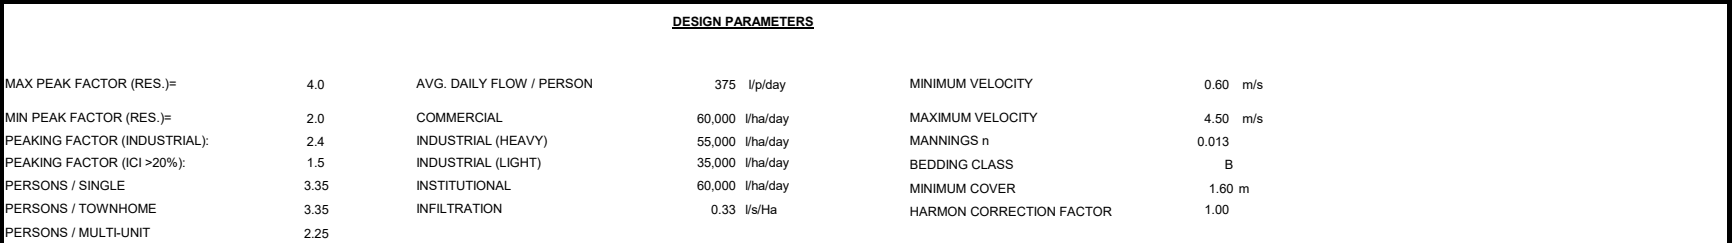

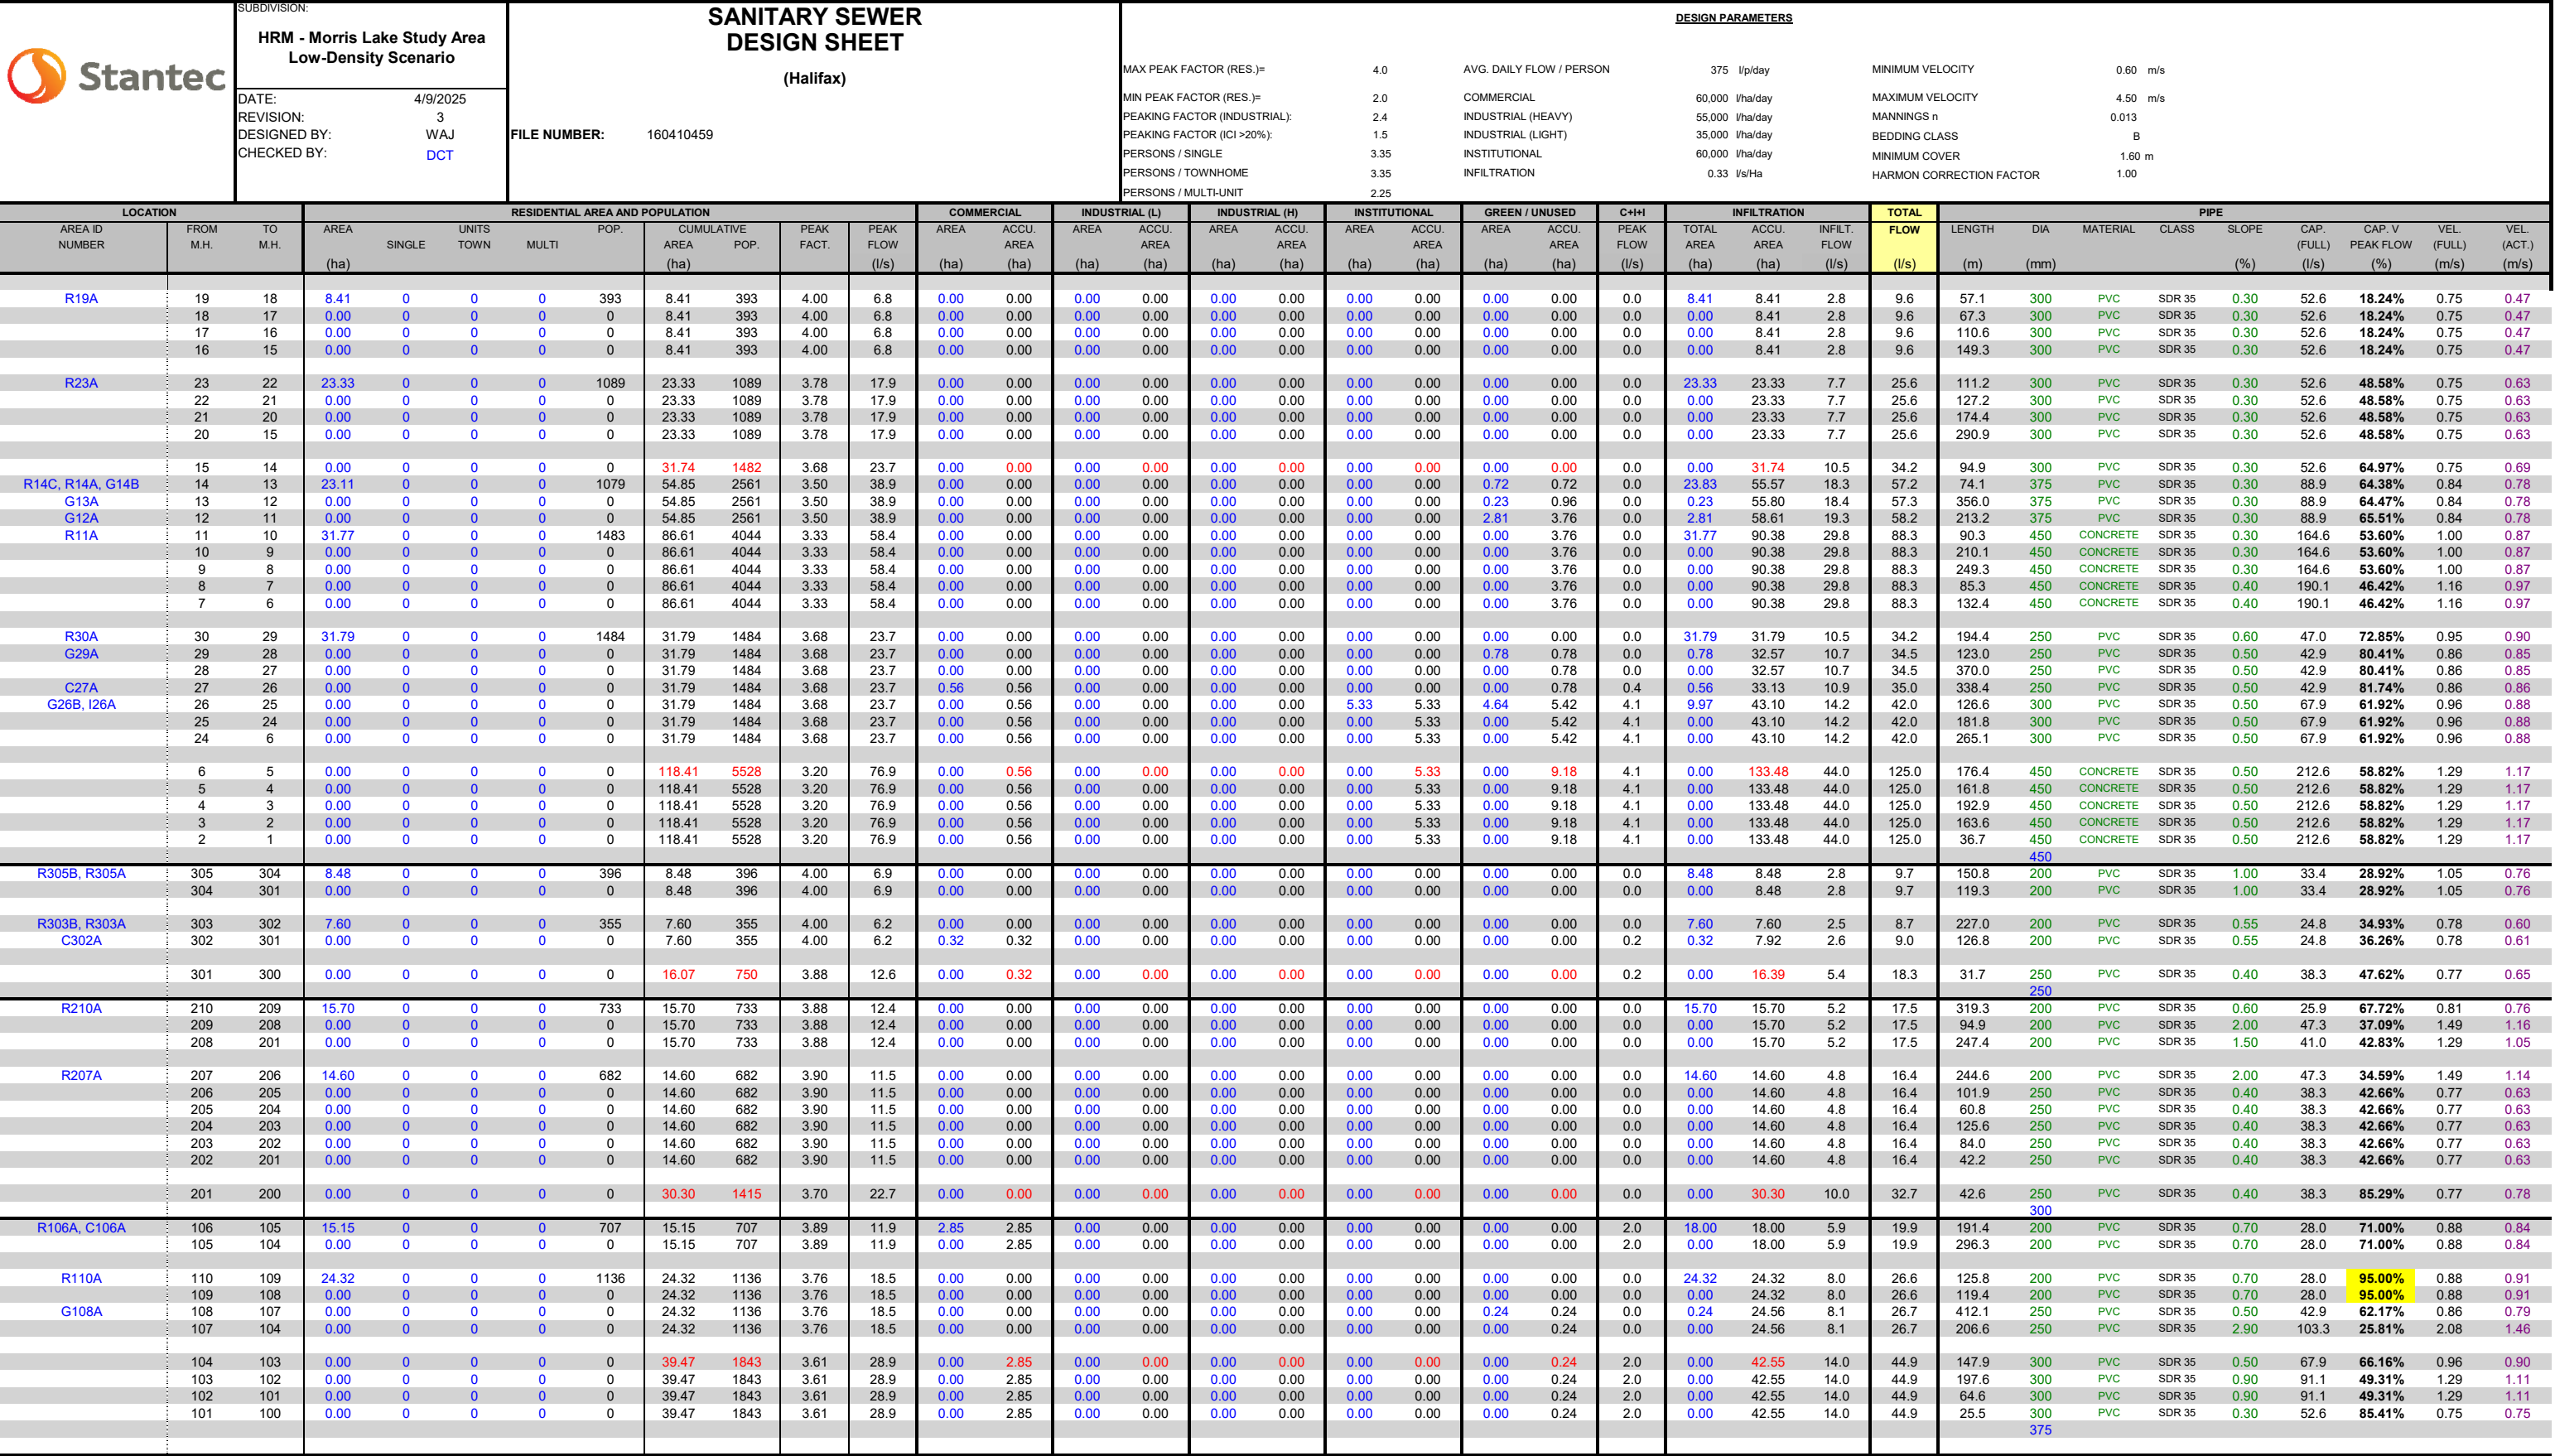


| <div><div><div></div></div><div>Stantec</div></div> |              |            | SUBDIVISION:                     |        | HRM - Morris Lake Study Area<br>Mid-Density Scenario |      | SANITARY SEWER<br>DESIGN SHEET<br><br>(Halifax) |                                |               |                       |              |                                    |                |                       |                |                               | DESIGN PARAMETERS                  |                       |                       |                       |                           |                          |               |               |                                      |          |          |              |                           |                            |                         |                         |      |      |  |
|-----------------------------------------------------|--------------|------------|----------------------------------|--------|------------------------------------------------------|------|-------------------------------------------------|--------------------------------|---------------|-----------------------|--------------|------------------------------------|----------------|-----------------------|----------------|-------------------------------|------------------------------------|-----------------------|-----------------------|-----------------------|---------------------------|--------------------------|---------------|---------------|--------------------------------------|----------|----------|--------------|---------------------------|----------------------------|-------------------------|-------------------------|------|------|--|
|                                                     |              |            |                                  |        |                                                      |      |                                                 |                                |               |                       |              |                                    |                |                       |                |                               | MAX PEAK FACTOR (RES.)= 4.0        |                       |                       |                       |                           |                          |               |               | AVG. DAILY FLOW / PERSON 375 l/p/day |          |          |              | MINIMUM VELOCITY 0.60 m/s |                            |                         |                         |      |      |  |
|                                                     |              |            | MIN PEAK FACTOR (RES.)= 2.0      |        |                                                      |      |                                                 |                                |               |                       |              |                                    |                |                       |                |                               | COMMERCIAL 60,000 l/ha/day         |                       |                       |                       | MAXIMUM VELOCITY 4.50 m/s |                          |               |               |                                      |          |          |              |                           |                            |                         |                         |      |      |  |
|                                                     |              |            | PEAKING FACTOR (INDUSTRIAL): 2.4 |        |                                                      |      |                                                 |                                |               |                       |              |                                    |                |                       |                |                               | INDUSTRIAL (HEAVY) 55,000 l/ha/day |                       |                       |                       | MANNINGS n 0.013          |                          |               |               |                                      |          |          |              |                           |                            |                         |                         |      |      |  |
| DESIGNED BY: WAJ                                    |              |            |                                  |        |                                                      |      |                                                 | PEAKING FACTOR (ICI >20%): 1.5 |               |                       |              | INDUSTRIAL (LIGHT) 35,000 l/ha/day |                |                       |                | BEDDING CLASS B               |                                    |                       |                       |                       |                           |                          |               |               |                                      |          |          |              |                           |                            |                         |                         |      |      |  |
| CHECKED BY: DCT                                     |              |            |                                  |        |                                                      |      |                                                 | PERSONS / SINGLE 3.35          |               |                       |              | INSTITUTIONAL 60,000 l/ha/day      |                |                       |                | MINIMUM COVER 1.60 m          |                                    |                       |                       |                       |                           |                          |               |               |                                      |          |          |              |                           |                            |                         |                         |      |      |  |
|                                                     |              |            |                                  |        |                                                      |      |                                                 | PERSONS / TOWNHOME 3.35        |               |                       |              | INFILTRATION 0.33 l/s/ha           |                |                       |                | HARMON CORRECTION FACTOR 1.00 |                                    |                       |                       |                       |                           |                          |               |               |                                      |          |          |              |                           |                            |                         |                         |      |      |  |
|                                                     |              |            |                                  |        |                                                      |      |                                                 | PERSONS / MULTI-UNIT 2.25      |               |                       |              |                                    |                |                       |                |                               |                                    |                       |                       |                       |                           |                          |               |               |                                      |          |          |              |                           |                            |                         |                         |      |      |  |
| LOCATION                                            |              |            | RESIDENTIAL AREA AND POPULATION  |        |                                                      |      |                                                 |                                |               |                       | COMMERCIAL   |                                    | INDUSTRIAL (L) |                       | INDUSTRIAL (H) |                               | INSTITUTIONAL                      |                       | GREEN / UNUSED        |                       | C+H                       | INFILTRATION             |               |               | TOTAL                                | PIPE     |          |              |                           |                            |                         |                         |      |      |  |
| AREA ID<br>NUMBER                                   | FROM<br>M.H. | TO<br>M.H. | AREA<br>(ha)                     | SINGLE | UNITS<br>TOWN                                        | POP. | CUMULATIVE<br>AREA<br>(ha)                      | POP.                           | PEAK<br>FACT. | PEAK<br>FLOW<br>(l/s) | AREA<br>(ha) | ACCU.<br>AREA<br>(ha)              | AREA<br>(ha)   | ACCU.<br>AREA<br>(ha) | AREA<br>(ha)   | ACCU.<br>AREA<br>(ha)         | AREA<br>(ha)                       | ACCU.<br>AREA<br>(ha) | PEAK<br>FLOW<br>(l/s) | TOTAL<br>AREA<br>(ha) | ACCU.<br>AREA<br>(ha)     | INFILT.<br>FLOW<br>(l/s) | FLOW<br>(l/s) | LENGTH<br>(m) | DIA<br>(mm)                          | MATERIAL | CLASS    | SLOPE<br>(%) | CAP.<br>(FULL)<br>(l/s)   | CAP. V<br>PEAK FLOW<br>(%) | VEL.<br>(FULL)<br>(m/s) | VEL.<br>(ACT.)<br>(m/s) |      |      |  |
| R19A                                                | 19           | 18         | 8.41                             | 0      | 0                                                    | 0    | 547                                             | 8.41                           | 547           | 3.95                  | 9.4          | 0.00                               | 0.00           | 0.00                  | 0.00           | 0.00                          | 0.00                               | 0.00                  | 0.00                  | 0.0                   | 8.41                      | 8.41                     | 2.8           | 12.2          | 57.1                                 | 300      | PVC      | SDR 35       | 0.30                      | 52.6                       | 23.12%                  | 0.75                    | 0.51 |      |  |
|                                                     | 18           | 17         | 0.00                             | 0      | 0                                                    | 0    | 0                                               | 8.41                           | 547           | 3.95                  | 9.4          | 0.00                               | 0.00           | 0.00                  | 0.00           | 0.00                          | 0.00                               | 0.00                  | 0.00                  | 0.0                   | 0.00                      | 8.41                     | 2.8           | 12.2          | 67.3                                 | 300      | PVC      | SDR 35       | 0.30                      | 52.6                       | 23.12%                  | 0.75                    | 0.51 |      |  |
|                                                     | 17           | 16         | 0.00                             | 0      | 0                                                    | 0    | 0                                               | 8.41                           | 547           | 3.95                  | 9.4          | 0.00                               | 0.00           | 0.00                  | 0.00           | 0.00                          | 0.00                               | 0.00                  | 0.00                  | 0.0                   | 0.00                      | 8.41                     | 2.8           | 12.2          | 110.6                                | 300      | PVC      | SDR 35       | 0.30                      | 52.6                       | 23.12%                  | 0.75                    | 0.51 |      |  |
|                                                     | 16           | 15         | 0.00                             | 0      | 0                                                    | 0    | 0                                               | 8.41                           | 547           | 3.95                  | 9.4          | 0.00                               | 0.00           | 0.00                  | 0.00           | 0.00                          | 0.00                               | 0.00                  | 0.00                  | 0.0                   | 0.00                      | 8.41                     | 2.8           | 12.2          | 149.3                                | 300      | PVC      | SDR 35       | 0.30                      | 52.6                       | 23.12%                  | 0.75                    | 0.51 |      |  |
| R23A                                                | 23           | 22         | 23.33                            | 0      | 0                                                    | 0    | 1517                                            | 23.33                          | 1517          | 3.68                  | 24.2         | 0.00                               | 0.00           | 0.00                  | 0.00           | 0.00                          | 0.00                               | 0.00                  | 0.00                  | 0.0                   | 23.33                     | 23.33                    | 7.7           | 31.9          | 111.2                                | 300      | PVC      | SDR 35       | 0.30                      | 52.6                       | 60.66%                  | 0.75                    | 0.68 |      |  |
|                                                     | 22           | 21         | 0.00                             | 0      | 0                                                    | 0    | 0                                               | 23.33                          | 1517          | 3.68                  | 24.2         | 0.00                               | 0.00           | 0.00                  | 0.00           | 0.00                          | 0.00                               | 0.00                  | 0.00                  | 0.0                   | 0.00                      | 23.33                    | 7.7           | 31.9          | 127.2                                | 300      | PVC      | SDR 35       | 0.30                      | 52.6                       | 60.66%                  | 0.75                    | 0.68 |      |  |
|                                                     | 21           | 20         | 0.00                             | 0      | 0                                                    | 0    | 0                                               | 23.33                          | 1517          | 3.68                  | 24.2         | 0.00                               | 0.00           | 0.00                  | 0.00           | 0.00                          | 0.00                               | 0.00                  | 0.00                  | 0.0                   | 0.00                      | 23.33                    | 7.7           | 31.9          | 174.4                                | 300      | PVC      | SDR 35       | 0.30                      | 52.6                       | 60.66%                  | 0.75                    | 0.68 |      |  |
|                                                     | 20           | 15         | 0.00                             | 0      | 0                                                    | 0    | 0                                               | 23.33                          | 1517          | 3.68                  | 24.2         | 0.00                               | 0.00           | 0.00                  | 0.00           | 0.00                          | 0.00                               | 0.00                  | 0.00                  | 0.0                   | 0.00                      | 23.33                    | 7.7           | 31.9          | 290.9                                | 300      | PVC      | SDR 35       | 0.30                      | 52.6                       | 60.66%                  | 0.75                    | 0.68 |      |  |
| R14C, R14A, G14B                                    | 15           | 14         | 0.00                             | 0      | 0                                                    | 0    | 0                                               | 31.74                          | 2064          | 3.58                  | 32.0         | 0.00                               | 0.00           | 0.00                  | 0.00           | 0.00                          | 0.00                               | 0.00                  | 0.00                  | 0.0                   | 0.00                      | 31.74                    | 10.5          | 42.5          | 94.9                                 | 300      | PVC      | SDR 35       | 0.30                      | 52.6                       | 80.81%                  | 0.75                    | 0.74 |      |  |
|                                                     | 14           | 13         | 23.11                            | 0      | 0                                                    | 0    | 1502                                            | 54.85                          | 3566          | 3.38                  | 52.3         | 0.00                               | 0.00           | 0.00                  | 0.00           | 0.00                          | 0.72                               | 0.72                  | 0.0                   | 23.83                 | 55.57                     | 18.3                     | 70.6          | 74.1          | 375                                  | PVC      | SDR 35   | 0.30         | 88.9                      | 79.43%                     | 0.84                    | 0.83                    |      |      |  |
| G13A                                                | 13           | 12         | 0.00                             | 0      | 0                                                    | 0    | 0                                               | 54.85                          | 3566          | 3.38                  | 52.3         | 0.00                               | 0.00           | 0.00                  | 0.00           | 0.00                          | 0.23                               | 0.96                  | 0.0                   | 0.23                  | 55.80                     | 18.4                     | 70.7          | 356.0         | 375                                  | PVC      | SDR 35   | 0.30         | 88.9                      | 79.52%                     | 0.84                    | 0.83                    |      |      |  |
| G12A                                                | 12           | 11         | 0.00                             | 0      | 0                                                    | 0    | 0                                               | 54.85                          | 3566          | 3.38                  | 52.3         | 0.00                               | 0.00           | 0.00                  | 0.00           | 0.00                          | 2.81                               | 3.76                  | 0.0                   | 2.81                  | 58.61                     | 19.3                     | 71.6          | 213.2         | 375                                  | PVC      | SDR 35   | 0.30         | 88.9                      | 80.56%                     | 0.84                    | 0.83                    |      |      |  |
| R11A                                                | 11           | 10         | 31.77                            | 0      | 0                                                    | 0    | 2065                                            | 86.61                          | 5631          | 3.20                  | 78.1         | 0.00                               | 0.00           | 0.00                  | 0.00           | 0.00                          | 0.00                               | 3.76                  | 0.0                   | 31.77                 | 90.38                     | 29.8                     | 108.0         | 90.3          | 450                                  | CONCRETE | SDR 35   | 0.30         | 164.6                     | 65.57%                     | 1.00                    | 0.93                    |      |      |  |
|                                                     | 10           | 9          | 0.00                             | 0      | 0                                                    | 0    | 0                                               | 86.61                          | 5631          | 3.20                  | 78.1         | 0.00                               | 0.00           | 0.00                  | 0.00           | 0.00                          | 0.00                               | 3.76                  | 0.0                   | 0.00                  | 90.38                     | 29.8                     | 108.0         | 210.1         | 450                                  | CONCRETE | SDR 35   | 0.30         | 164.6                     | 65.57%                     | 1.00                    | 0.93                    |      |      |  |
|                                                     | 9            | 8          | 0.00                             | 0      | 0                                                    | 0    | 0                                               | 86.61                          | 5631          | 3.20                  | 78.1         | 0.00                               | 0.00           | 0.00                  | 0.00           | 0.00                          | 0.00                               | 3.76                  | 0.0                   | 0.00                  | 90.38                     | 29.8                     | 108.0         | 249.3         | 450                                  | CONCRETE | SDR 35   | 0.30         | 164.6                     | 65.57%                     | 1.00                    | 0.93                    |      |      |  |
|                                                     | 8            | 7          | 0.00                             | 0      | 0                                                    | 0    | 0                                               | 86.61                          | 5631          | 3.20                  | 78.1         | 0.00                               | 0.00           | 0.00                  | 0.00           | 0.00                          | 0.00                               | 3.76                  | 0.0                   | 0.00                  | 90.38                     | 29.8                     | 108.0         | 85.3          | 450                                  | CONCRETE | SDR 35   | 0.40         | 190.1                     | 56.79%                     | 1.16                    | 1.03                    |      |      |  |
|                                                     | 7            | 6          | 0.00                             | 0      | 0                                                    | 0    | 0                                               | 86.61                          | 5631          | 3.20                  | 78.1         | 0.00                               | 0.00           | 0.00                  | 0.00           | 0.00                          | 0.00                               | 3.76                  | 0.0                   | 0.00                  | 90.38                     | 29.8                     | 108.0         | 132.4         | 450                                  | CONCRETE | SDR 35   | 0.40         | 190.1                     | 56.79%                     | 1.16                    | 1.03                    |      |      |  |
| R30A                                                | 30           | 29         | 31.79                            | 0      | 0                                                    | 0    | 2067                                            | 31.79                          | 2067          | 3.57                  | 32.1         | 0.00                               | 0.00           | 0.00                  | 0.00           | 0.00                          | 0.00                               | 0.00                  | 0.00                  | 0.0                   | 31.79                     | 31.79                    | 10.5          | 42.6          | 194.4                                | 250      | PVC      | SDR 35       | 0.60                      | 47.0                       | 90.62%                  | 0.95                    | 0.97 |      |  |
| G29A                                                | 29           | 28         | 0.00                             | 0      | 0                                                    | 0    | 0                                               | 31.79                          | 2067          | 3.57                  | 32.1         | 0.00                               | 0.00           | 0.00                  | 0.00           | 0.00                          | 0.78                               | 0.78                  | 0.0                   | 0.78                  | 32.57                     | 10.7                     | 42.8          | 123.0         | 250                                  | PVC      | SDR 35   | 0.50         | 42.9                      | 99.87%                     | 0.86                    | 0.91                    |      |      |  |
|                                                     | 28           | 27         | 0.00                             | 0      | 0                                                    | 0    | 0                                               | 31.79                          | 2067          | 3.57                  | 32.1         | 0.00                               | 0.00           | 0.00                  | 0.00           | 0.00                          | 0.00                               | 0.78                  | 0.0                   | 0.00                  | 32.57                     | 10.7                     | 42.8          | 370.0         | 250                                  | PVC      | SDR 35   | 0.50         | 42.9                      | 99.87%                     | 0.86                    | 0.91                    |      |      |  |
| C27A                                                | 27           | 26         | 0.00                             | 0      | 0                                                    | 0    | 0                                               | 31.79                          | 2067          | 3.57                  | 32.1         | 0.56                               | 0.56           | 0.00                  | 0.00           | 0.00                          | 0.00                               | 0.78                  | 0.4                   | 0.56                  | 33.13                     | 10.9                     | 43.4          | 338.4         | 250                                  | PVC      | SDR 35   | 0.50         | 42.9                      | 101.20%                    | 0.86                    | 0.91                    |      |      |  |
| G26B, I26A                                          | 26           | 25         | 0.00                             | 0      | 0                                                    | 0    | 0                                               | 31.79                          | 2067          | 3.57                  | 32.1         | 0.00                               | 0.56           | 0.00                  | 0.00           | 0.00                          | 5.33                               | 5.33                  | 4.64                  | 5.42                  | 4.1                       | 9.97                     | 43.10         | 14.2          | 50.4                                 | 126.6    | 300      | PVC          | SDR 35                    | 0.50                       | 67.9                    | 74.21%                  | 0.96 | 0.93 |  |
|                                                     | 25           | 24         | 0.00                             | 0      | 0                                                    | 0    | 0                                               | 31.79                          | 2067          | 3.57                  | 32.1         | 0.00                               | 0.56           | 0.00                  | 0.00           | 0.00                          | 5.33                               | 0.00                  | 5.42                  | 4.1                   | 0.00                      | 43.10                    | 14.2          | 50.4          | 181.8                                | 300      | PVC      | SDR 35       | 0.50                      | 67.9                       | 74.21%                  | 0.96                    | 0.93 |      |  |
|                                                     | 24           | 6          | 0.00                             | 0      | 0                                                    | 0    | 0                                               | 31.79                          | 2067          | 3.57                  | 32.1         | 0.00                               | 0.56           | 0.00                  | 0.00           | 0.00                          | 5.33                               | 0.00                  | 5.42                  | 4.1                   | 0.00                      | 43.10                    | 14.2          | 50.4          | 265.1                                | 300      | PVC      | SDR 35       | 0.50                      | 67.9                       | 74.21%                  | 0.96                    | 0.93 |      |  |
|                                                     | 6            | 5          | 0.00                             | 0      | 0                                                    | 0    | 0                                               | 118.41                         | 7698          | 3.07                  | 102.5        | 0.00                               | 0.56           | 0.00                  | 0.00           | 0.00                          | 5.33                               | 0.00                  | 9.18                  | 4.1                   | 0.00                      | 133.48                   | 44.0          | 150.6         | 176.4                                | 450      | CONCRETE | SDR 35       | 0.50                      | 212.6                      | 70.85%                  | 1.29                    | 1.23 |      |  |
|                                                     | 5            | 4          | 0.00                             | 0      | 0                                                    | 0    | 0                                               | 118.41                         | 7698          | 3.07                  | 102.5        | 0.00                               | 0.56           | 0.00                  | 0.00           | 0.00                          | 5.33                               | 0.00                  | 9.18                  | 4.1                   | 0.00                      | 133.48                   | 44.0          | 150.6         | 161.8                                |          |          |              |                           |                            |                         |                         |      |      |  |

## Appendix C Drawings



Legend

- CONCEPTUAL RESIDENTIAL AREA
- CONCEPTUAL INSTITUTIONAL AREA
- CONCEPTUAL LANDSCAPED/PARK AREA
- CONCEPTUAL COMMERCIAL
- CONCEPTUAL WATER BODY AREA
- SANITARY DRAINAGE AREA ID#
- POPULATION
- SANITARY DRAINAGE AREA NO.
- SANITARY DRAINAGE AREA
- PROPOSED SANITARY SEWER
- EXISTING SANITARY SEWER
- PROPOSED FORECATHAN
- FORECATHAN FLOW DIRECTION
- EXISTING PHASE
- STUDY AREA

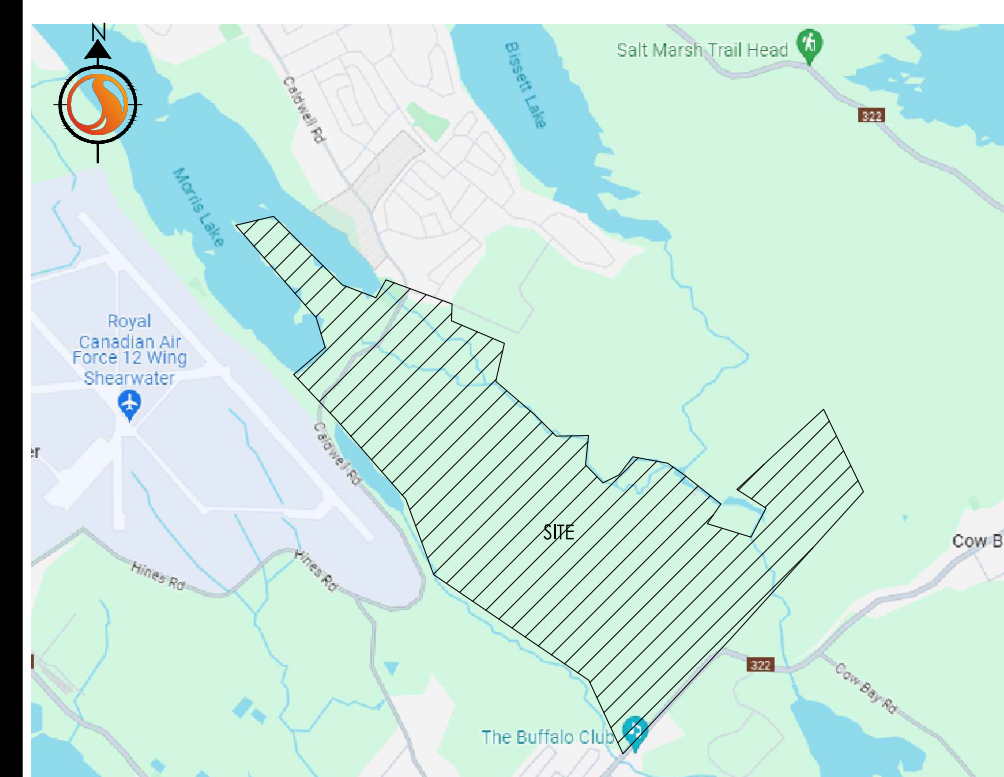

Notes

- DENSITIES INTERPOLATED FROM PER REPORT DEVELOPMENT SCENARIOS - DRAFT
- MORRIS LAKE STUDY AREA PREPARED BY STANTEC CONSULTING DATED DECEMBER, 2023.
- AVERAGE HOUSEHOLD SIZE = 2.3
- LOW DENSITY = 10.44 PERSONS
- MID DENSITY = 13.33 PERSONS
- HIGH DENSITY = 21.33 PERSONS

|   |                              |     |       |          |
|---|------------------------------|-----|-------|----------|
| 3 | REVISED PER COMMENTS         | WJA | DCT   | 25.04.07 |
| 2 | REVISED AS PER CITY COMMENTS | WJA | AMP   | 26.10.24 |
| 1 | ISSUED FOR REVIEW            | WJA | DCT   | 24.05.17 |
|   |                              | By  | Appd. | YYMMDD   |

|            |                              |      |       |        |          |
|------------|------------------------------|------|-------|--------|----------|
| File Name: | 160410459-028 (Rev) 1021.dwg | WJA  | DCT   | WJA    | 24.01.23 |
|            |                              | Dwn. | Chk'd | Diagn. | YYMMDD   |

Permit-Seal

Client/Project  
HALIFAX REGIONAL MUNICIPALITY

Future Serviced Communities  
Morris Lake  
Halifax, Nova Scotia

Title  
MORRIS LAKE  
CONCEPTUAL SANITARY DRAINAGE PLAN


Project No.  
160410459

Drawing No.  
SA-1

Scale  
1:4000

Sheet  
1 of 2

Revision  
3

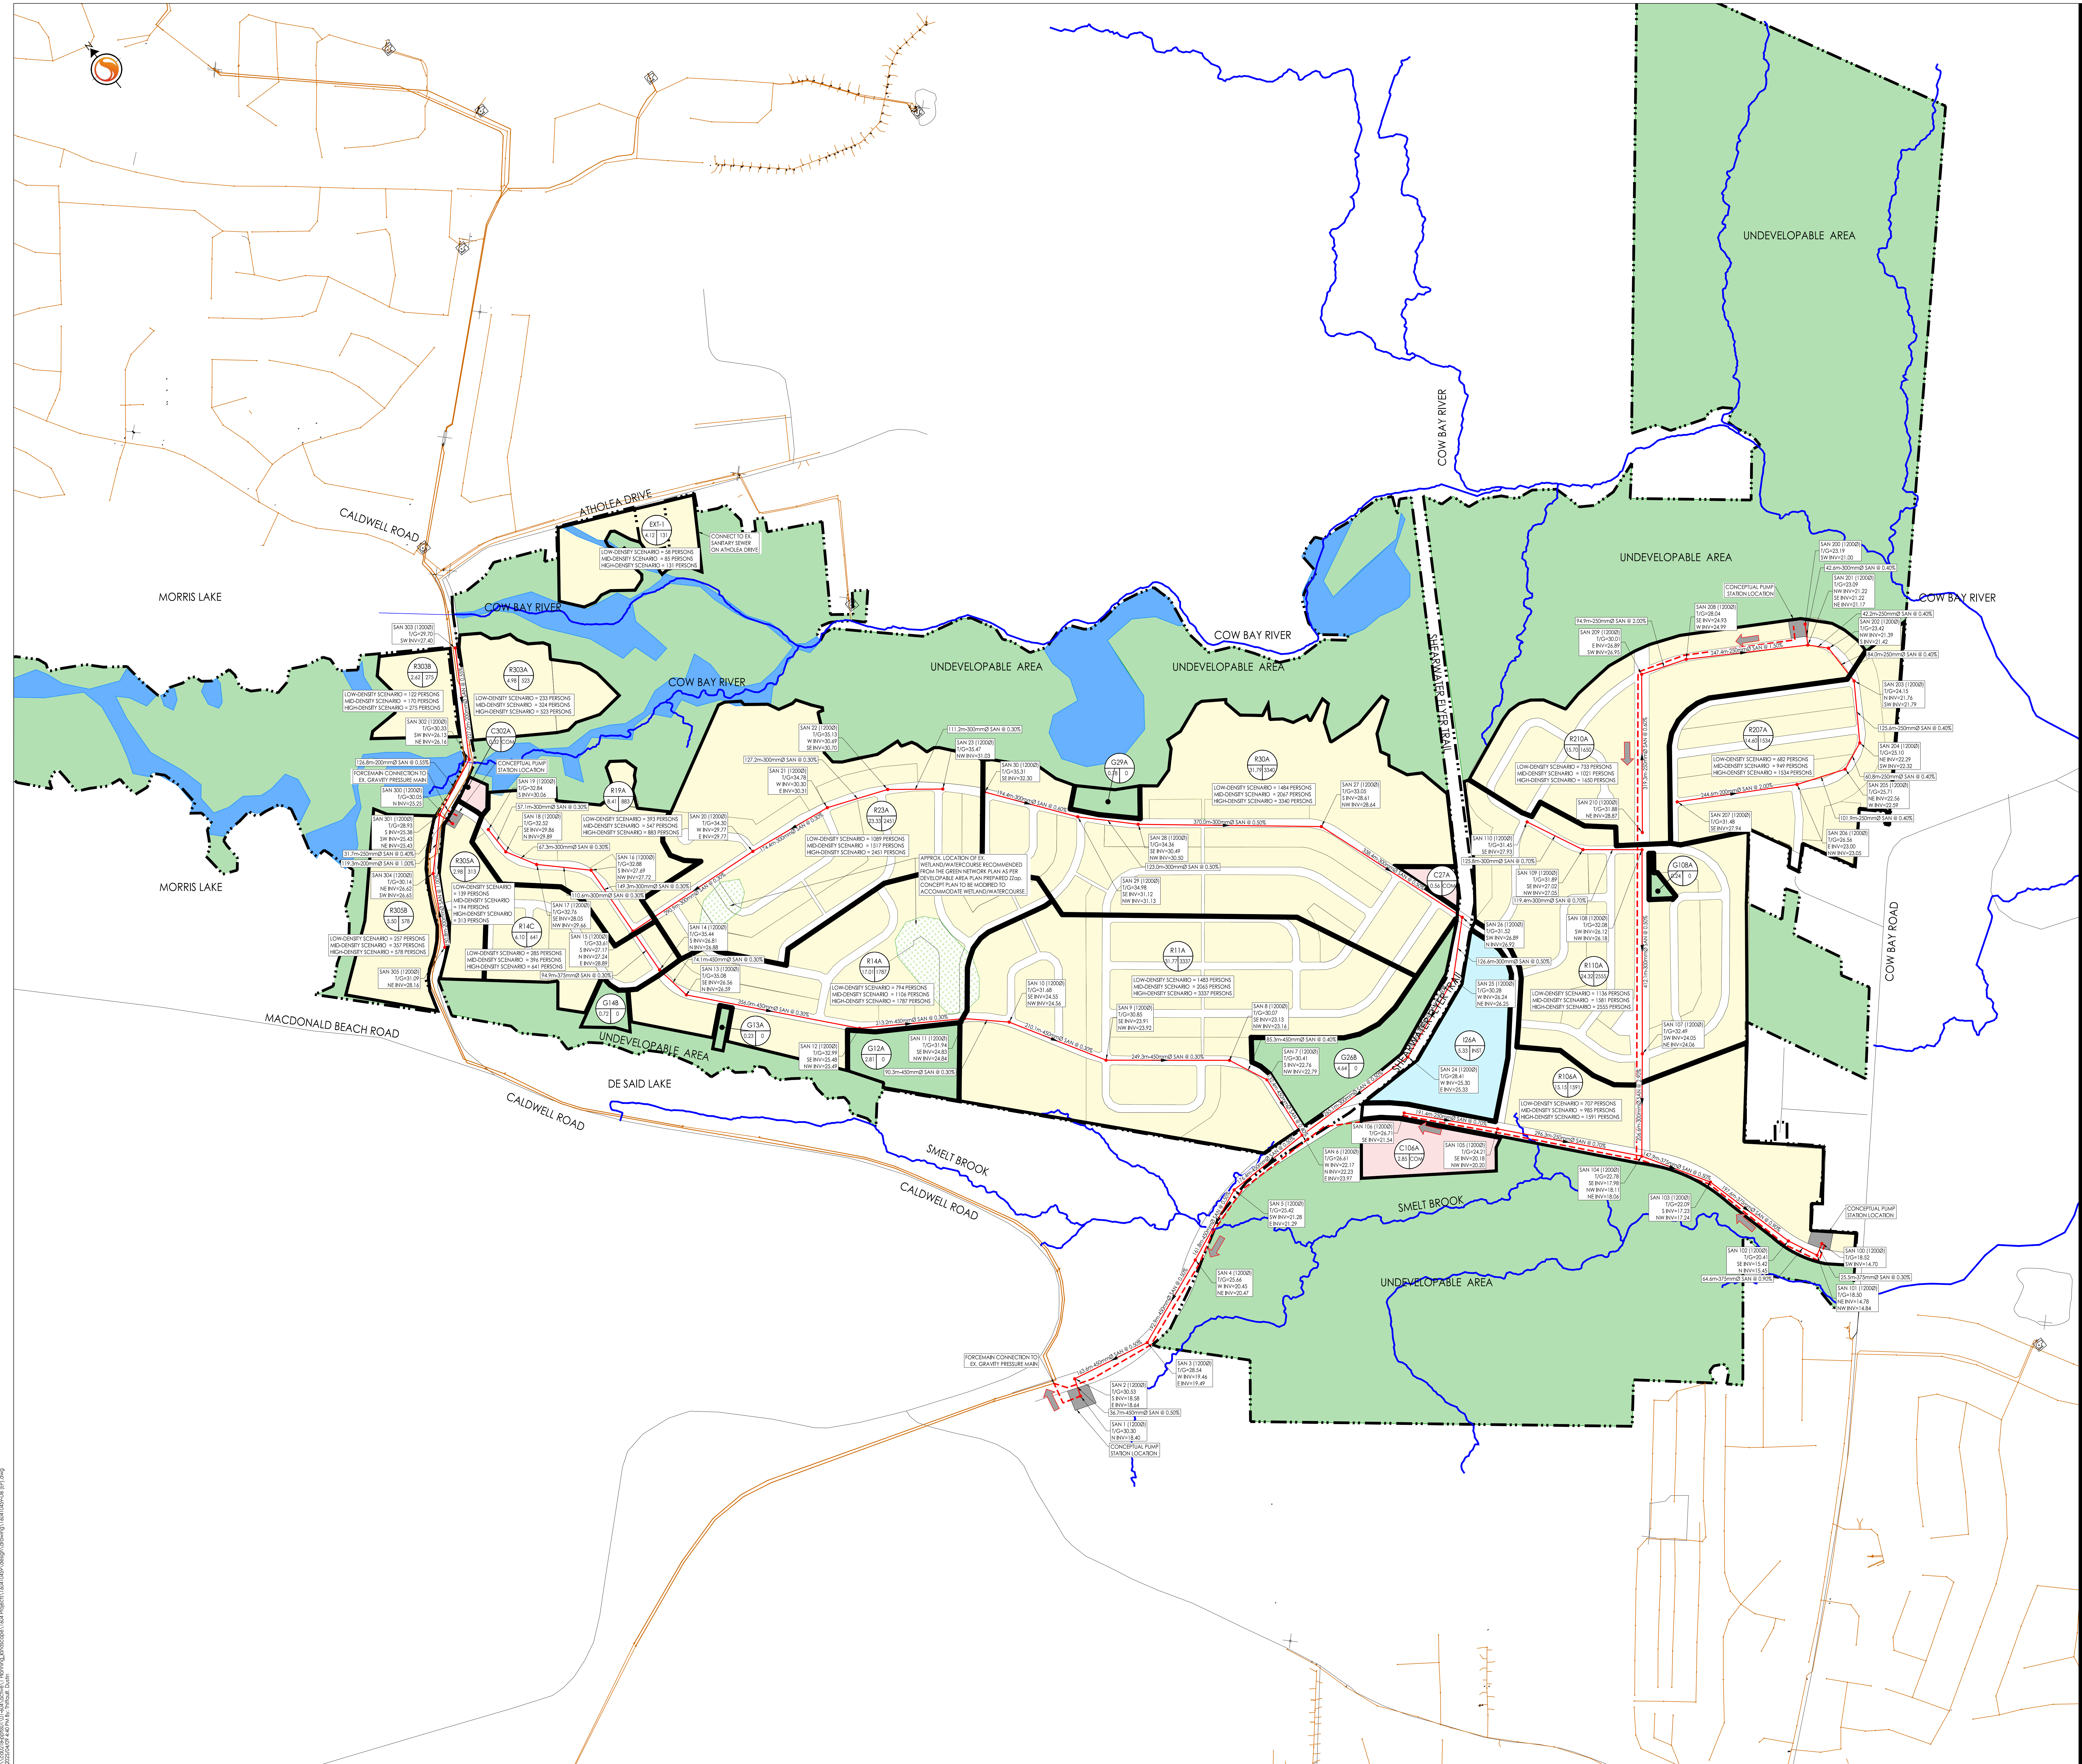



Copyright Reserved

The Contractor shall verify and be responsible for all dimensions. DO NOT scale the drawing - any errors or omissions shall be reported to Stantec without delay.

The Copyrights to all designs and drawings are the property of Stantec. Reproduction or use for any purpose other than that authorized by Stantec is forbidden.

|                                 |
|---------------------------------|
| CONCEPTUAL RESIDENTIAL AREA     |
| CONCEPTUAL INSTITUTIONAL AREA   |
| CONCEPTUAL LANDSCAPED/PARK AREA |
| CONCEPTUAL COMMERCIAL           |
| CONCEPTUAL WATER BODY AREA      |

|                                                                                     |                              |
|-------------------------------------------------------------------------------------|------------------------------|
|  | PROPOSED ELEVATION           |
|  | FLOW DIRECTION AND GRADE     |
|  | DIRECTION OF OVERLAND FLOW   |
|  | EXISTING MAJOR (10m) CONTOUR |
|  | EXISTING MINOR (5m) CONTOUR  |
|  | STUDY AREA                   |



Notes

CONTOUR INTERVAL IS 5.0m

|                              |     |       |          |
|------------------------------|-----|-------|----------|
|                              |     |       |          |
| REVISED PER COMMENTS         | WAJ | DCT   | 25.04.09 |
| REVISED AS PER CITY COMMENTS | WAJ | AMP   | 24.10.24 |
| ISSUED FOR REVIEW            | WAJ | DCT   | 24.05.17 |
| Revision                     | By  | Appd. | YY.MM.DD |

|                                     |     |     |     |          |
|-------------------------------------|-----|-----|-----|----------|
| № Norme: 160410459-DB [Hwy 102].dwg | WAJ | DCT | WAJ | 24.01.25 |
|-------------------------------------|-----|-----|-----|----------|

Client/Project  
HALIFAX REGIONAL MUNICIPALITY

Future Serviced Communities  
Morris Lake  
Halifax, Nova Scotia

title  
MORRIS LAKE  
CONCEPTUAL GRADING PLAN

Project No. 160410459

Scale 1:4000

0 40 120 200m

|             |        |          |
|-------------|--------|----------|
| Drawing No. | Sheet  | Revision |
| GP-1        | 2 of 2 | 3        |