
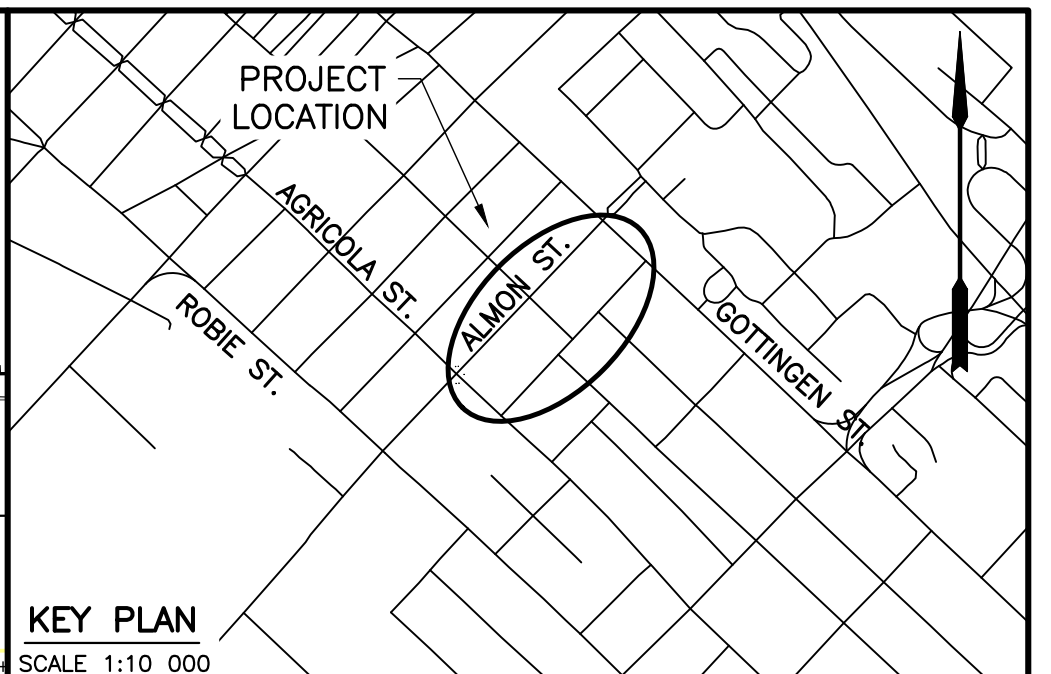


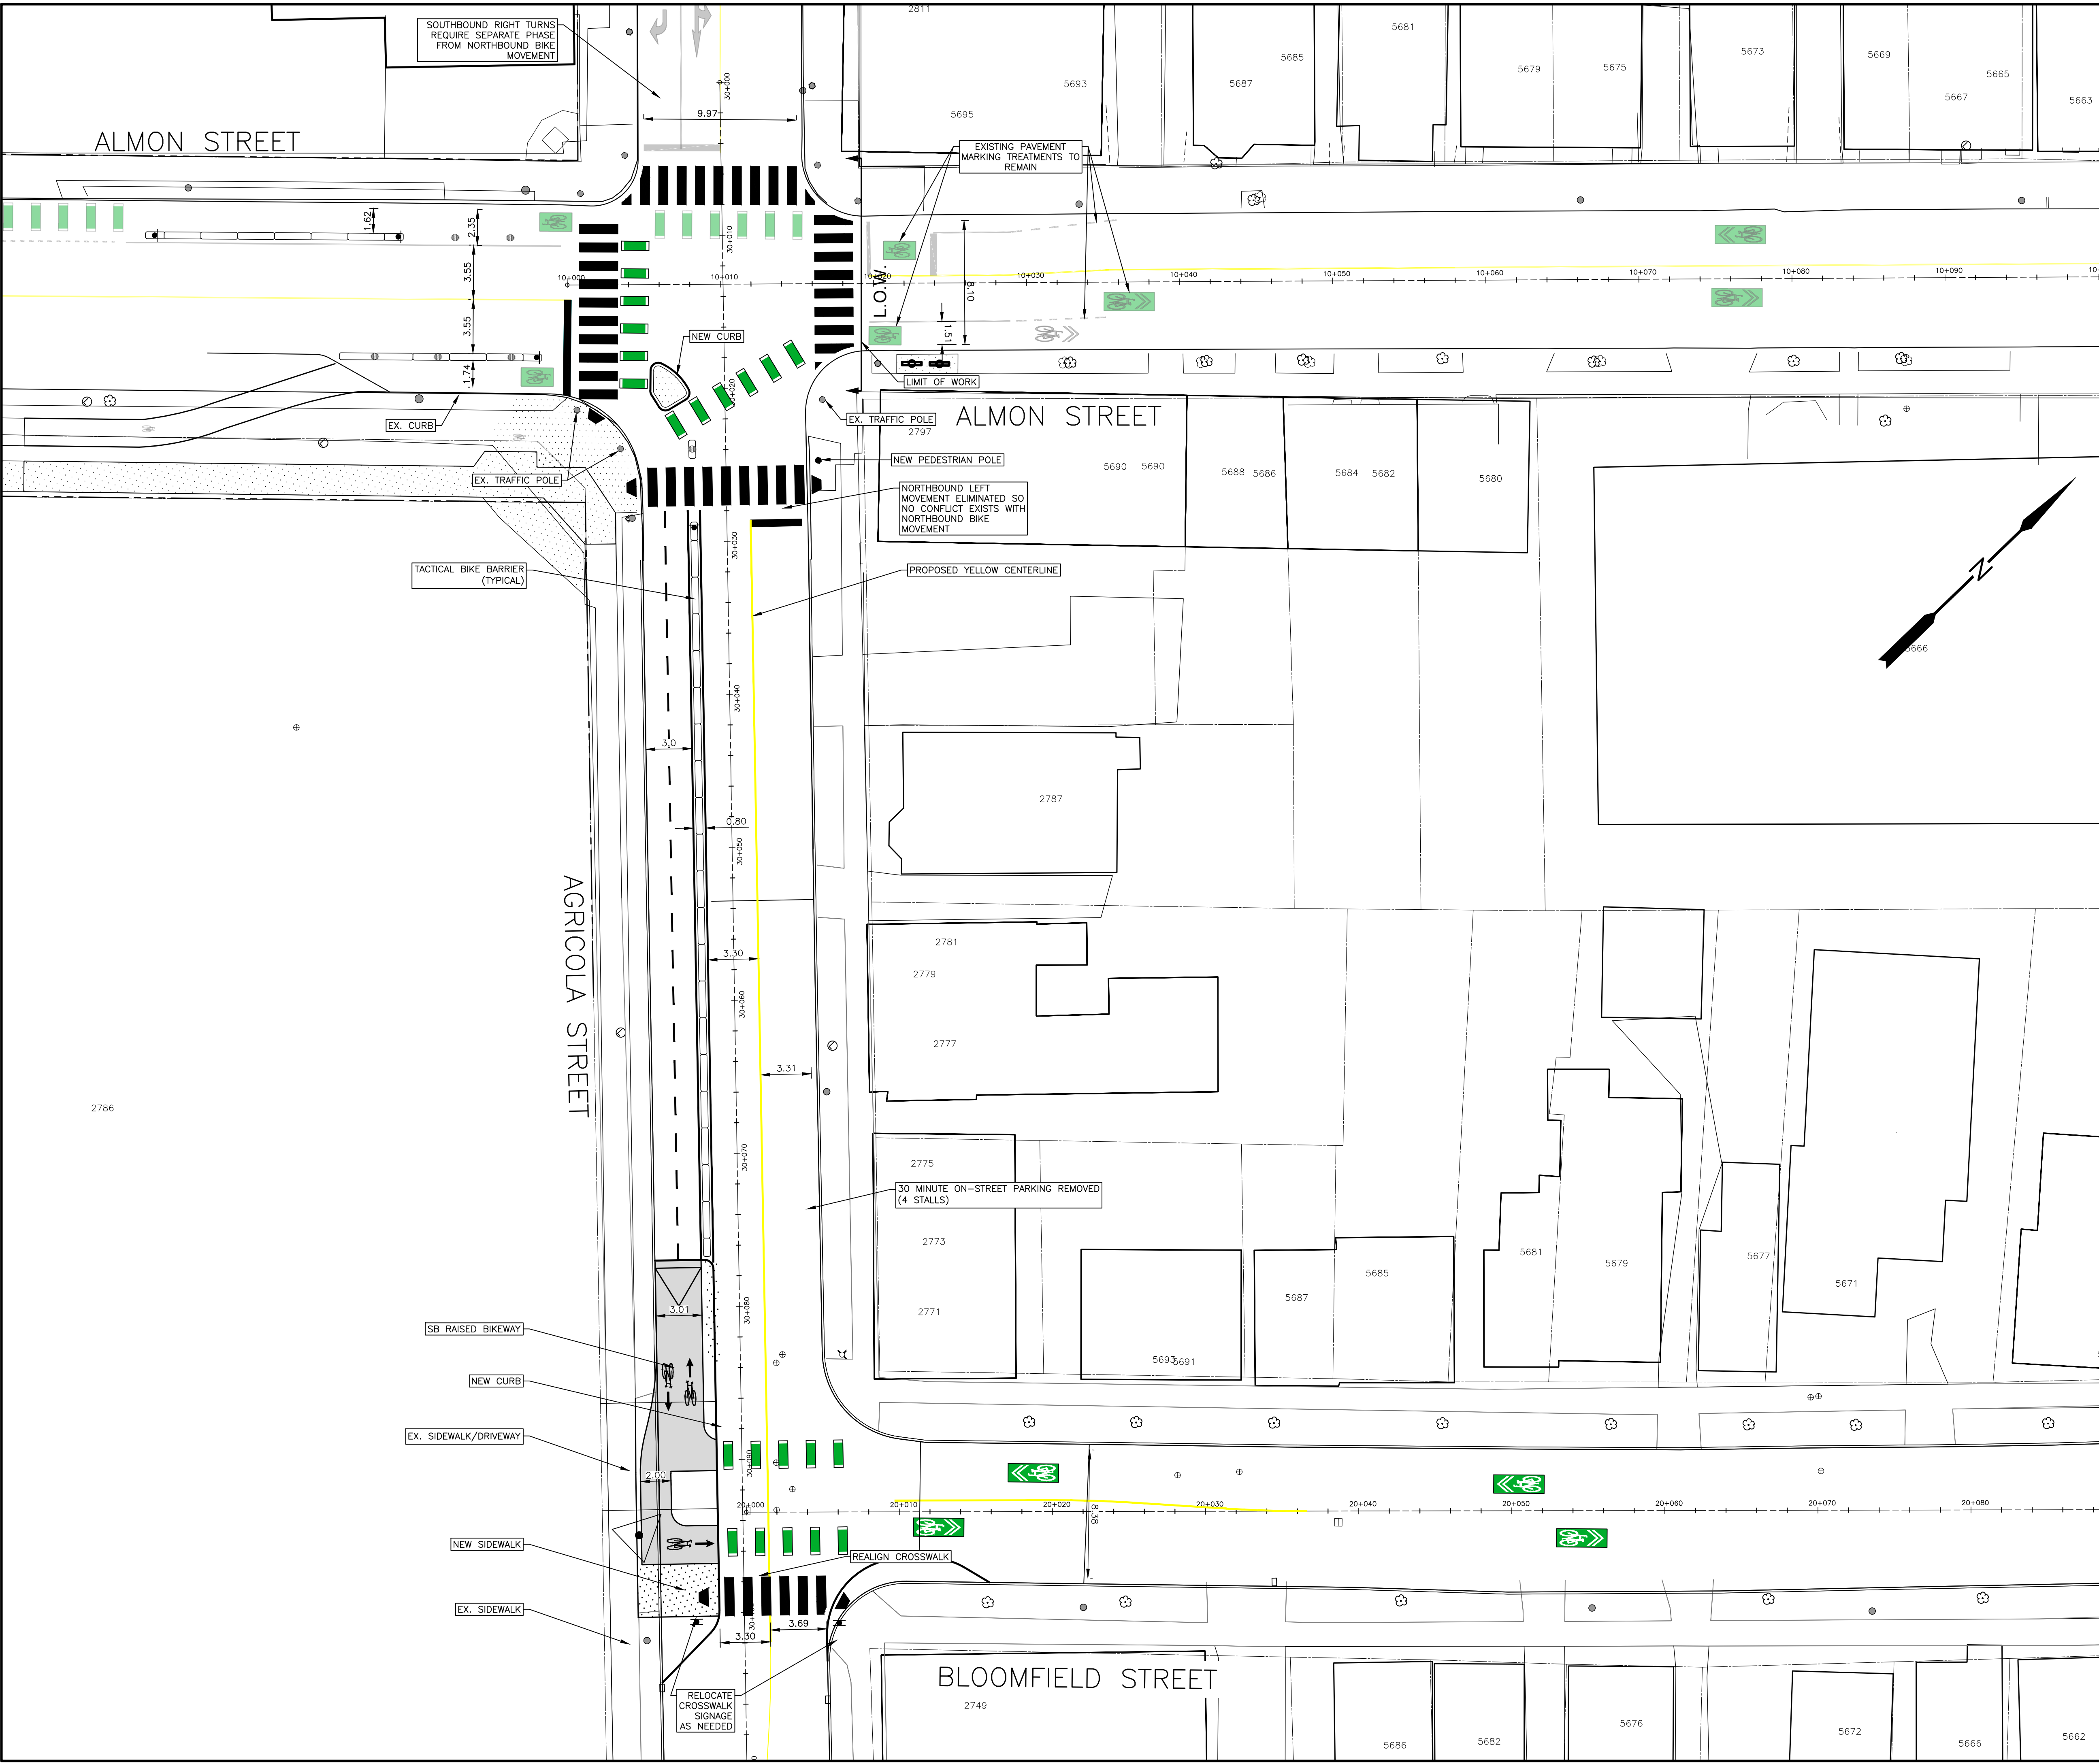

EXISTING		PROPOSED	
	SURVEY CONTROL MARKER		WATER VALVE
	FIRE HYDRANT		UTILITY POLE AND GUY WIRE
	TRAFFIC STREET LIGHT		SIGN POST/BASE
	FENCE		RETAINING WALL
	CONCRETE CURB		STREET LINE
	COMBINED MANHOLE & PIPE		SANITARY MANHOLE & PIPE
	STORM MANHOLE & PIPE		CATCHBASIN
	GAS MAIN		CONCRETE SURFACE
	ASPHALT SURFACE		EDGE OF GRAVEL SURFACE
	WATERMAIN		TREE
	PEDESTRIAN RAMP		CONTROLLER BOX
	TRAFFIC SIGNAL POLE		JUNCTION BOX
	RADAR SYSTEM		TRAFFIC SIGNAL HEAD
	PEDESTRIAN HEAD		ELECTRICAL CONDUIT
	STREET LIGHT CONDUIT		TELECOMMUNICATIONS CONDUIT
	HEDGE		

- NOTES**
1. PLAN VALUES ARE BASED ON THE NOVA SCOTIA COORDINATE REFERENCING SYSTEM.
 2. ALL WORK IS TO BE DONE IN ACCORDANCE WITH HRM CONTRACT DOCUMENTS.
 3. GRADES SHOWN ARE APPROXIMATE. FINISHED GRADE IS TO BE APPROVED IN THE FIELD BY THE ENGINEER.
 4. UTILITY INFORMATION IS APPROXIMATE ONLY. CONTRACTOR IS RESPONSIBLE TO ARRANGE FOR ON SITE LOCATES WITH ALL UTILITIES PRIOR TO START OF WORK. CONTACT www.info-ex.com AND OTHERS AS REQUIRED.
 5. CONTRACTOR TO OBTAIN ALL NECESSARY PERMITS REQUIRED TO PERFORM WORK AND TO COMPLY WITH ALL APPLICABLE ENVIRONMENTAL REGULATIONS.
 6. WHERE EXISTING CONDITIONS ARE SHOWN THEY ARE NOT NECESSARILY ACCURATE OR COMPLETE. THE CONTRACTOR SHALL CHECK AND VERIFY ALL EXISTING DIMENSIONS AND LOCATIONS AND REPORT ANY DISCREPANCIES TO THE ENGINEER.
 7. THE CONTRACTOR SHALL CHECK AND VERIFY ALL PROPOSED DIMENSIONS BEFORE PROCEEDING WITH CONSTRUCTION. ANY ADJUSTMENTS WILL BE MADE BY THE ENGINEER AS NECESSARY.
 8. CONTRACTOR IS RESPONSIBLE FOR SETTING GRADES AND LAYOUT CONTROL.
 9. TRAFFIC SIGNS ARE NOT TO BE REMOVED OR REPLACED WITHOUT AUTHORIZATION FROM THE TRAFFIC AUTHORITY AND THE ENGINEER.
 10. THE CONTRACTOR IS RESPONSIBLE FOR PROTECTION OF TREES. TREES ARE NOT TO BE REMOVED WITHOUT PERMISSION FROM THE ENGINEER.
 11. WORK IN THE IMMEDIATE AREA OF A NOVA SCOTIA COORDINATE MONUMENT MUST BE CARRIED OUT BY HAND. THE CONTRACTOR IS RESPONSIBLE FOR ANY COSTS IF MONUMENTS ARE DISTURBED.
 12. AT COMPLETION OF WORK REINSTATE ALL DISTURBED SURFACES TO THE SATISFACTION OF THE ENGINEER.
 13. WATER VALVE BOX EXTENSIONS - THE MINIMUM INSIDE DIAMETER OF A VALVE BOX EXTENSION SHALL BE 125 mm AND THE MINIMUM LENGTH OF A VALVE BOX EXTENSION SHALL BE 300 mm. CONTRACTOR TO CONFIRM APPROPRIATE PRODUCT TO BE USED WITH HALIFAX WATER OPERATIONS DEPARTMENT STAFF.
 14. ALL PROPOSED PEDESTRIAN RAMPS TO INCLUDE TACTILE WALKING SURFACE INDICATOR PLATES AS PER HRM DETAIL 131 UNLESS OTHERWISE NOTED.
 15. LANE WIDTH DIMENSIONS ON PLAN ARE TO EDGE OF PAVEMENT UNLESS OTHERWISE NOTED.

REVIEWED AND APPROVED FOR TRAFFIC SIGNALS AND PAVEMENT MARKINGS				
Appr'd _____		Date _____		
for		TRAFFIC AUTHORITY		
3	FEB 06/26	ISSUED FOR 10% DESIGN REVIEW		GD/JC
2	JAN 19/25	ISSUED FOR 10% DESIGN REVIEW		GD
1	DEC 08/25	ISSUED FOR 10% DESIGN REVIEW		GD
No.	Date	Revision	Description	Appr'd

PRELIMINARY
PRE-TENDER REVIEW

HALIFAX

ALMON STREET
AGRICOLA STREET TO GOTTIGEN STREET
HALIFAX

**ALMON STREET FUNCTIONAL AT PLAN
PROPOSED PLAN
CONCEPT 2**

Date	JAN. 19/25	Drawn	JTGB	Tender No.	25-000
Scale	Horz. 1:200 Vert.	Survey No.	SU21xxxx	Sheet	1 OF 2
Reference	DATUM HORZ: NAD83(CSRS) EPOCH 2010.0 3" MTM PROJECTION ZONE 5 VERT: CGVD2013	Drawing No.	25000000		
Checked					

