
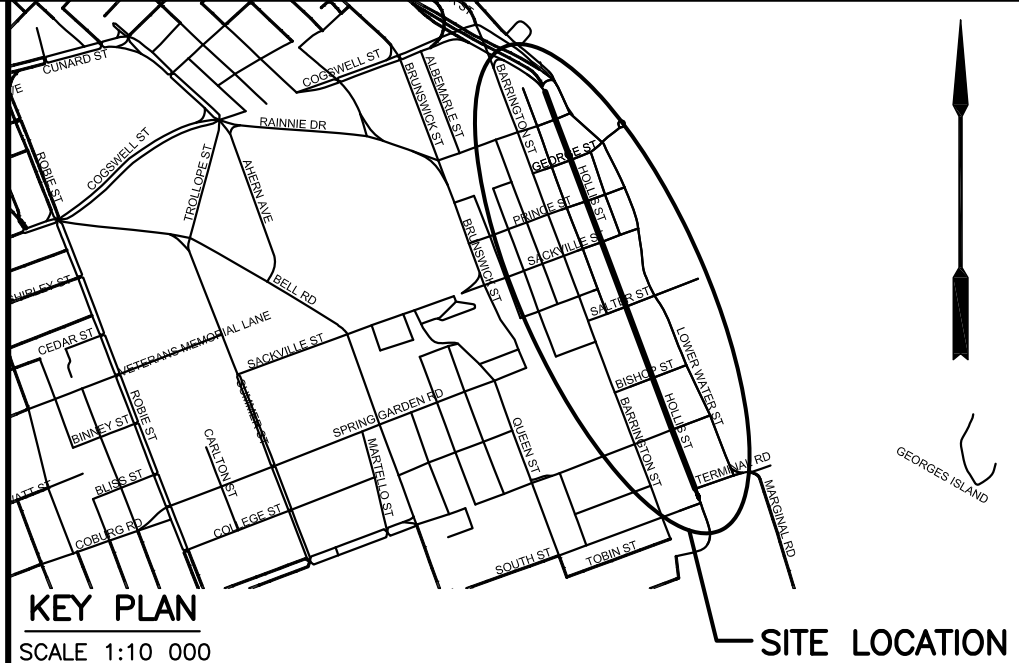
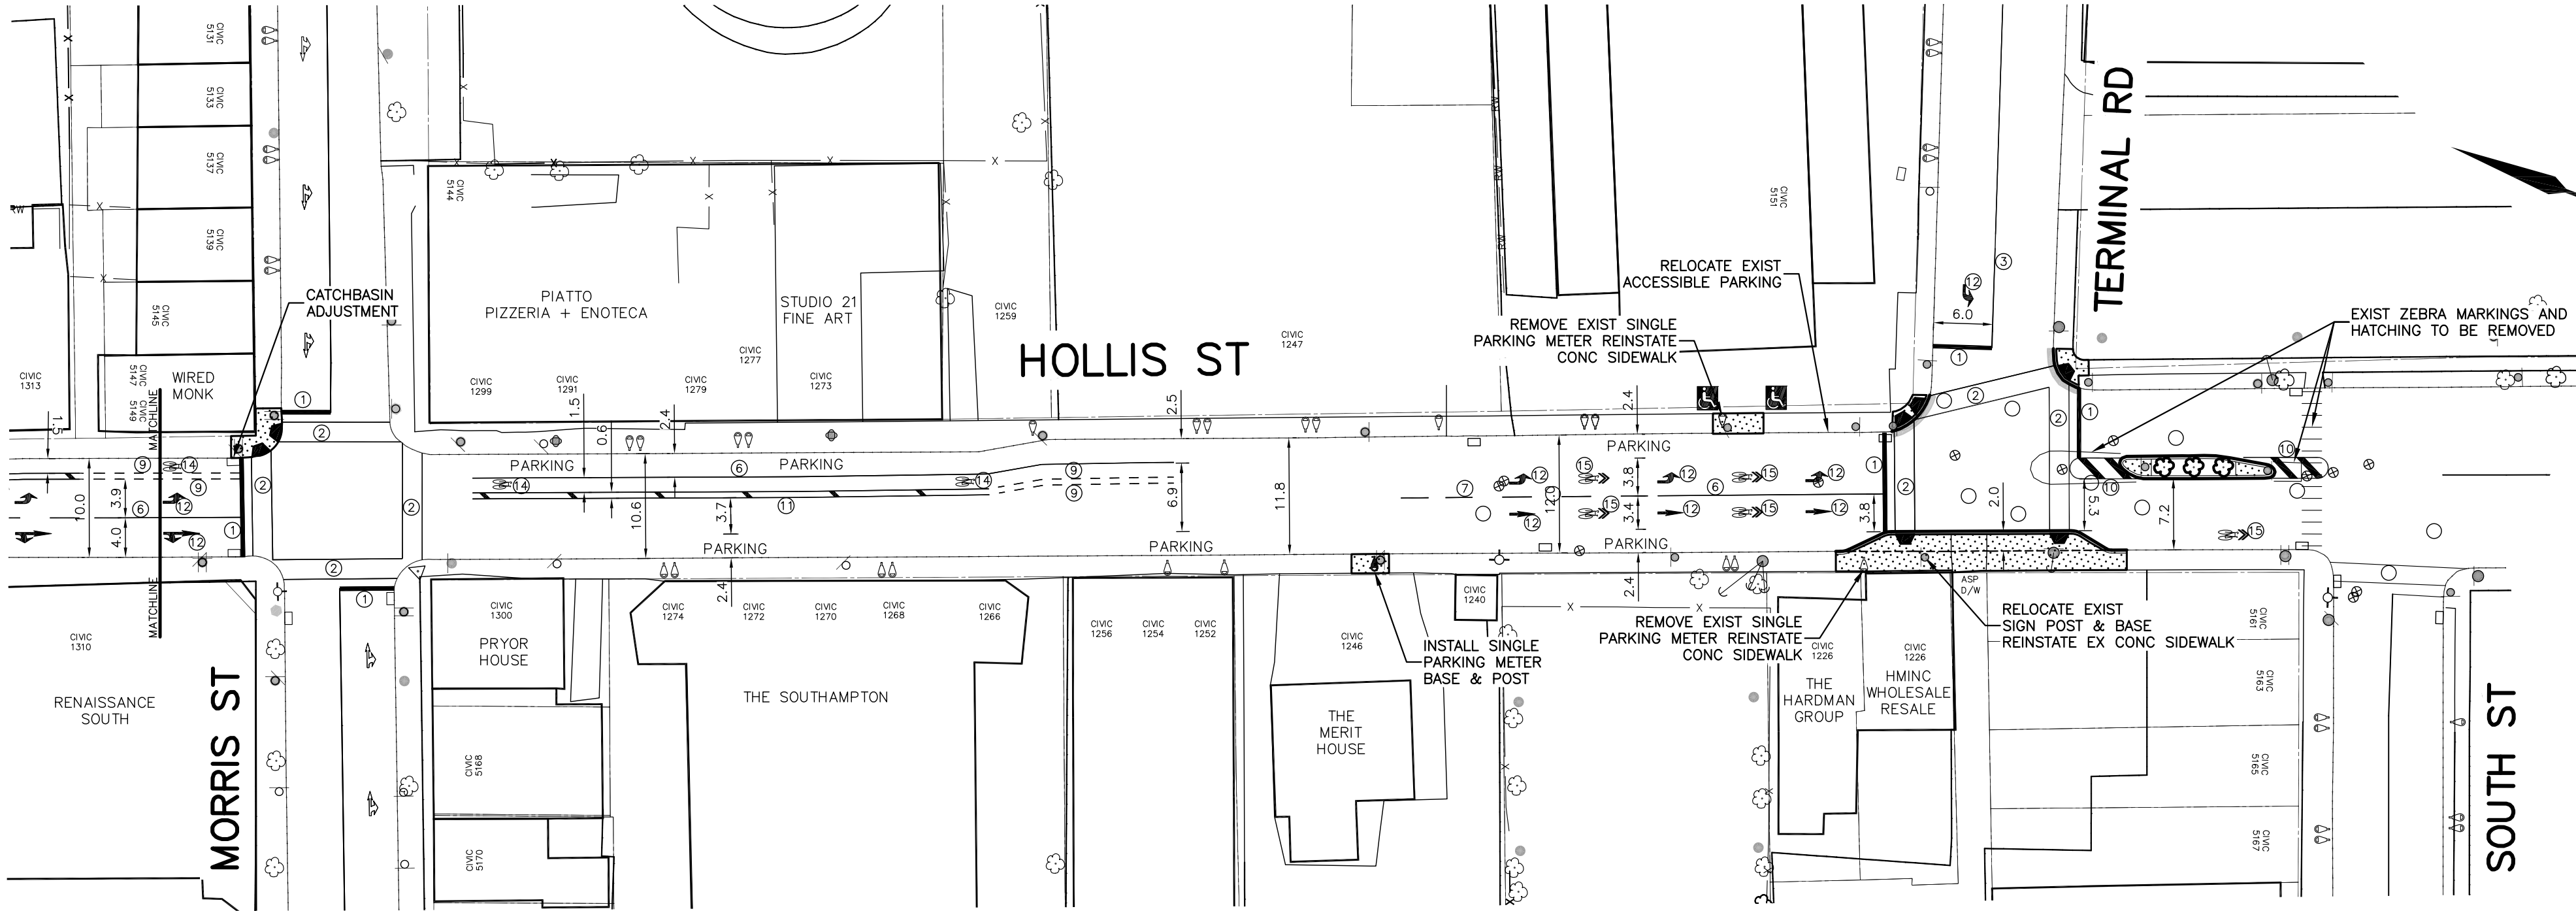


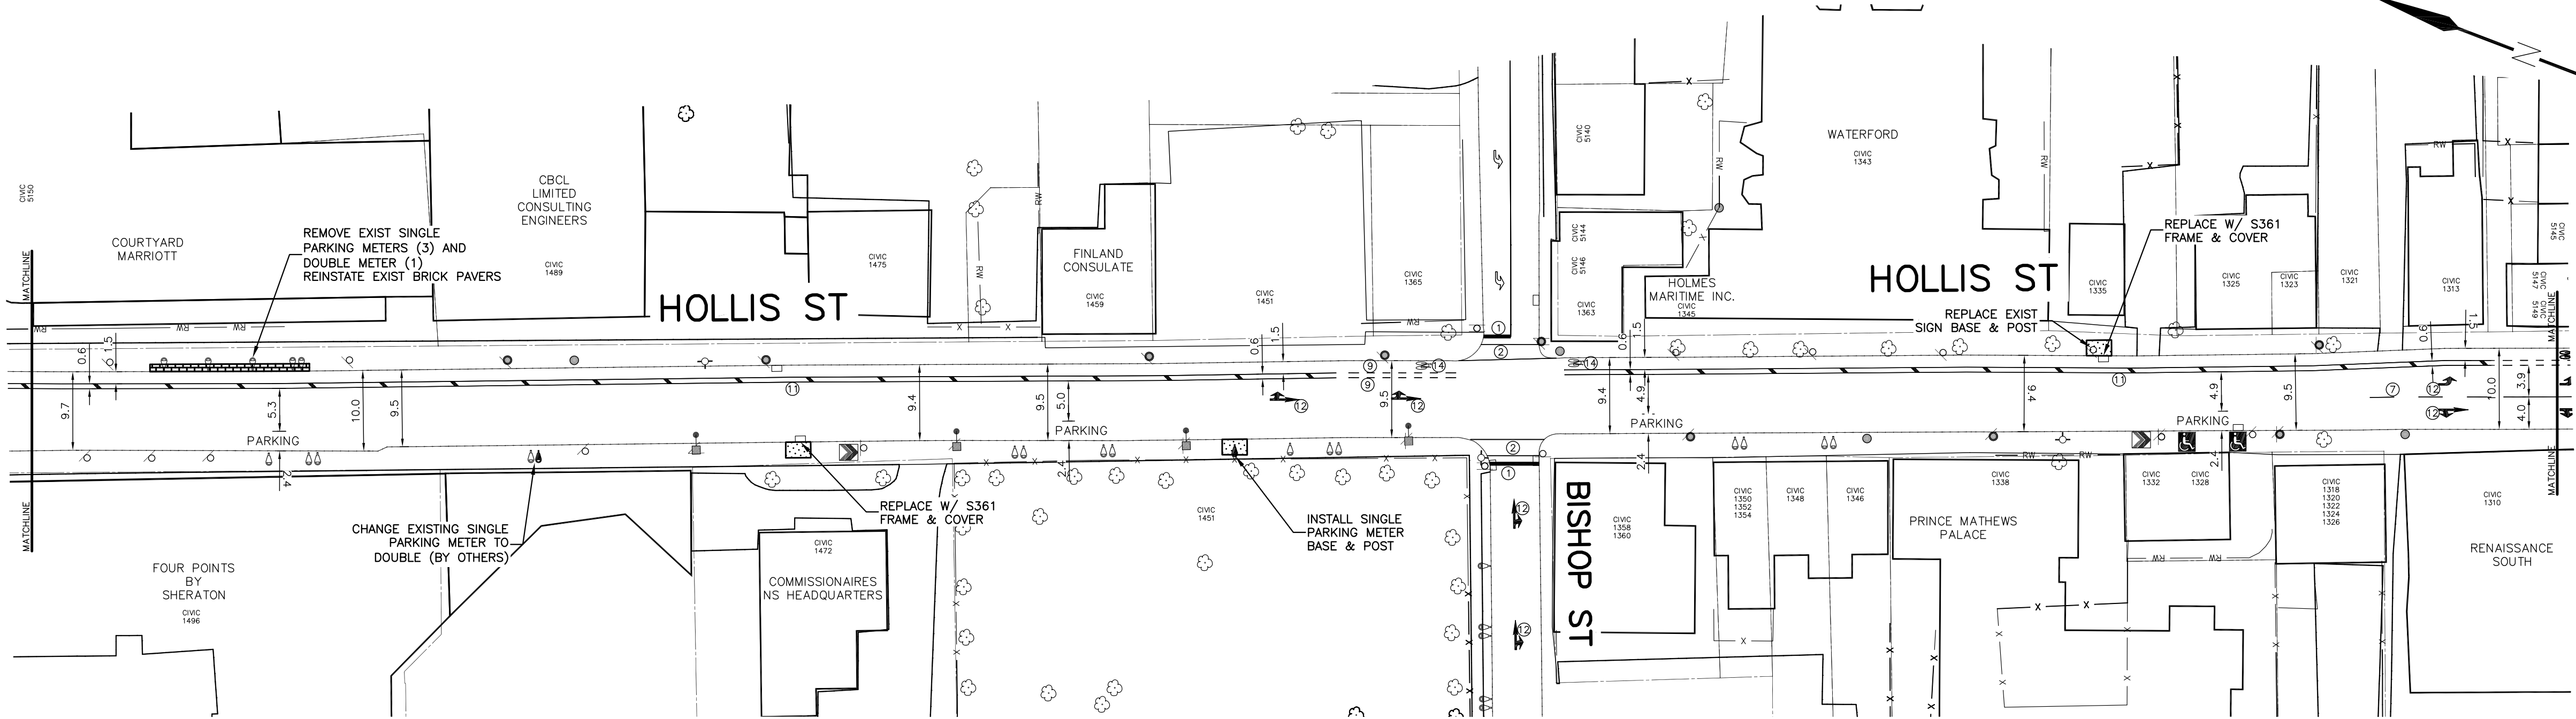

PLAN LEGEND	
EXISTING	PROPOSED
PT NO	SURVEY CONTROL POINT
WATERVALVE	WATERVALVE
FIRE HYDRANT	FIRE HYDRANT
UTILITY POLE AND GUY WIRE	UTILITY POLE AND GUY WIRE
SIGN POST/BASE	SIGN POST/BASE
FENCE	FENCE
RETAINING WALL	RETAINING WALL
CONCRETE CURB	CONCRETE CURB
PROPERTY LINE	PROPERTY LINE
BASELINE	BASELINE
SEWER MANHOLES	SEWER MANHOLES
CATCHBASIN	CATCHBASIN
GAS MAIN	GAS MAIN
CONCRETE SURFACE	CONCRETE SURFACE
ASPHALT SURFACE	ASPHALT SURFACE
EDGE OF GRAVEL SURFACE	EDGE OF GRAVEL SURFACE
WATERMAIN	WATERMAIN
TREE	TREE
DETECTOR LOOP	DETECTOR LOOP
PEDESTRIAN RAMP	PEDESTRIAN RAMP
BUS STOP AND/OR SHELTER	BUS STOP AND/OR SHELTER

- NOTES**
- ALL WORK IS TO BE DONE IN ACCORDANCE WITH HRM CONTRACT DOCUMENTS.
 - GRADES SHOWN ARE APPROXIMATE. FINISHED GRADE IS TO BE APPROVED IN THE FIELD BY THE ENGINEER.
 - UTILITY INFORMATION IS APPROXIMATE ONLY. CONTRACTOR IS RESPONSIBLE TO ARRANGE FOR ON SITE LOCATES WITH ALL UTILITIES PRIOR TO START OF WORK.
 - CONTRACTOR TO OBTAIN ALL NECESSARY PERMITS REQUIRED TO PERFORM WORK AND TO COMPLY WITH ALL APPLICABLE ENVIRONMENTAL REGULATIONS.
 - WHERE EXISTING CONDITIONS ARE SHOWN THEY ARE NOT NECESSARILY ACCURATE OR COMPLETE. THE CONTRACTOR SHALL CONFIRM ALL EXISTING DIMENSIONS AND LOCATIONS AND REPORT ANY DISCREPANCIES TO THE ENGINEER.
 - THE CONTRACTOR SHALL CHECK AND VERIFY ALL PROPOSED DIMENSIONS BEFORE PROCEEDING WITH CONSTRUCTION. ANY ADJUSTMENTS WILL BE MADE BY THE ENGINEER AS NECESSARY.
 - CONTRACTOR IS RESPONSIBLE FOR SETTING GRADES AND LAYOUT CONTROL.
 - TRAFFIC SIGNS ARE NOT TO BE REMOVED OR REPLACED WITHOUT AUTHORIZATION FROM THE TRAFFIC AUTHORITY AND THE ENGINEER.
 - THE CONTRACTOR IS RESPONSIBLE FOR PROTECTION OF TREES. TREES ARE NOT TO BE REMOVED WITHOUT PERMISSION FROM THE ENGINEER.
 - WORK IN THE IMMEDIATE AREA OF A NOVA SCOTIA COORDINATE MONUMENT MUST BE CARRIED OUT BY HAND. THE CONTRACTOR IS RESPONSIBLE FOR ANY COSTS IF MONUMENTS ARE DISTURBED.
 - AT COMPLETION OF WORK REINSTATE ALL DISTURBED SURFACES TO THE SATISFACTION OF THE ENGINEER.
 - WATER VALVE BOX EXTENSIONS - THE MINIMUM INSIDE DIAMETER OF A VALVE BOX EXTENSION SHALL BE 125 mm AND THE MINIMUM LENGTH OF A VALVE BOX EXTENSION SHALL BE 300 mm. CONTRACTOR TO CONFIRM APPROPRIATE PRODUCT TO BE USED WITH HALIFAX WATER OPERATIONS DEPARTMENT STAFF.

REVIEWED AND APPROVED FOR TRAFFIC SIGNALS AND PAVEMENT MARKINGS

Appr'd _____ Date _____

for TRAFFIC AUTHORITY

3		ISSUED FOR CONSTRUCTION		
2		ISSUED FOR TENDER		
1	FEB 27, 2015	ISSUED FOR PRETENDER DESIGN REVIEW	DH	
No.	Date	Revision	Description	Appr'd

PRE-TENDER

REVIEW

HALIFAX

HOLLIS STREET

COGSWELL TO SOUTH STREET

HALIFAX - WEST REGION

PAVEMENT MARKINGS / BIKE LANE MARKINGS

Date
11/20/2014

Scale
Horz: 1:500
Vert: N/A

Reference

Drawn
JW

Checked

Survey No.
GIS EXTRACTION

Tender No.
15-239

Sheet
2 Of 2

Drawing No.
14013102